

Single Mode Fiber Coupled Laser Module




Features

- 494nm Diode Laser
- 3.5um SM Fiber
- Fast Rise Time

Model Number	B494-SMF10
Center Wavelength ⁽¹⁾	494nm
Operating Voltage (DC)	≤ 7V
Operating Current	≤ 135mA
Output Power ⁽¹⁾	~10mW
Fiber coupling efficiency	30%

Dimensions (Unit: mm)

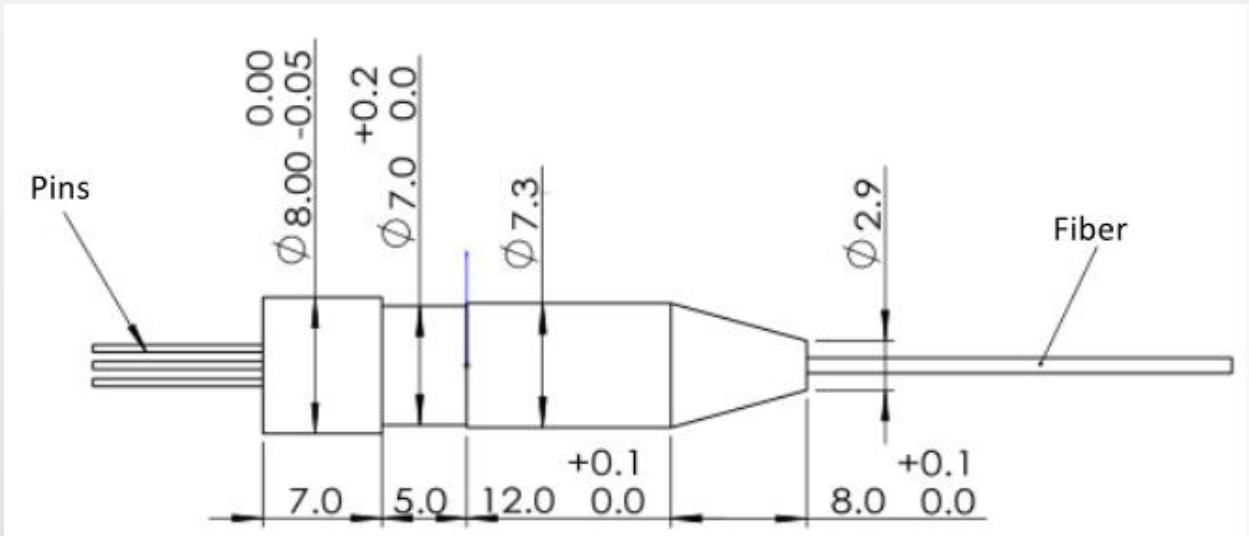


⁽¹⁾ after fiber, at 25°C

- Customer is responsible for suitable heat sinking

Specifications

Mechanical Specifications		Min	Typ	Max
Laser Head	Diameter (mm)	-	8	-
	Length (mm)	-	32	-
	Weight (g)	-	10	-
Housing Material		SUS304		
Optical Specifications		Min	Typ	Max
Center Wavelength @25°C		480	494	-
Spectral Width(FWHM)		-	2	-
Output Power(mW)@25°C		-	10	-
Power Stability @25°C over 1h		-	±2%	±5%
M ²		-	2.1	2.5
Longitudinal Mode		Single Mode Fiber		
Output Power Mode		CW		
Laser Class		3B		
Fiber Specifications		Min	Typ	Max
Fiber Type		3..5/125um with 900um loose tube		
Fiber Numerical Aperture			0.13	
Fiber Length (m)			1	
Fiber Termination		FC/PC or FC/APC or SMA905		
Reliability		Min	Typ	Max
Operating Case Temperature Range (°C)		-10	-	60
Storage Temperature (°C)		-40	-	85
Environmental Humidity (RH, %)		5	-	85
RoHS Compliance Declaration		Yes		

Beam Picture



Fiber Connector Picture

